

POWERFUL. INTELLIGENT. EFFICIENT.



# COOL MUSCLE

CM3 | CM3+ CATALOGUE

# Motor performance that drives you to **success.**

Integration of the components necessary for high performance closed loop servo systems creates efficiencies and optimizes motion performance. The CM3 Cool Muscle achieves 100W of power with only 24Vdc.

## I/O Interface

Up to 6 Inputs & 4 Outputs

## Communication Interface

RS-232C

Optional: RS-485, EtherCAT, MODBUS

## Motor Frame

42mm

56mm

## Status LED

Multi-colored status indication

## Controller

Tuningless or Adjustable

## PLC Function

Programmable I/O  
Arithmetic &  
Logic commands

## Driver

Vector drive with closed loop position and current feedback


## High-Precision Absolute Encoder

Single turn with optional  
Multi-rotation location retention

**COOL MUSCLE**<sup>™</sup>  
INTEGRATED SERVO SYSTEMS

# COOL MUSCLE™

## MOTION CONTROL TECHNOLOGY

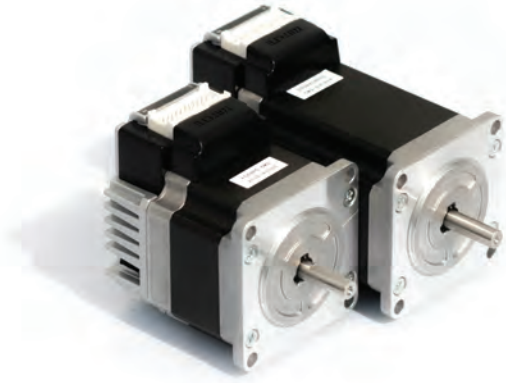


Expanding on the established Cool Muscle technologies from the CM1 and CM2 lines, Muscle Corp has implemented a new drive design allowing for higher speed and power while the modern control algorithms, embedded PLC functionality, and energy efficiency that has made the Cool Muscle an industry leader.

## Closed-Loop Control

### HIGH ACCURACY AND REPEATABILITY

The closed-loop control system maintains a minimal deviation between the encoder feedback and the commanded position within a defined range. Speed ripple is reduced, positional repeatability is increased, and heat generation is managed by tightly controlling the current in the motor's windings.

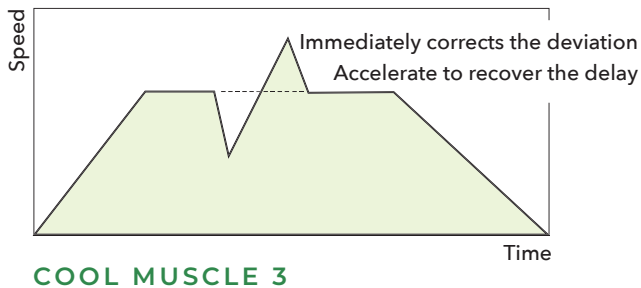

### CLOSED-LOOP CONTROL


1. Improved positioning repeatability.
2. Reduced speed ripple results in quieter operation, and higher energy efficiency.
3. Responsive motor correction to dynamic load changes or collisions.

## Vector Control


### SMOOTHER, QUIETER MOTION

The CM3 utilizes vector control which enables seamless motion without microstepping between angular increments; resulting in reduced vibration and noise. Torque is optimized in real time and responds to dynamic loading conditions which drastically improves the torque/power density, and efficiency of the motor.

### DRIVING PRINCIPLE



Stepping motor



**COOL MUSCLE**

### VECTOR CONTROL

1. Energy savings through precise torque control
2. Efficient and consistent control though the entire speed range of the motor.
3. Accurate control during acceleration resulting in higher rates and cycling frequencies.

# CM3 FEATURES AND FUNCTIONS



## CM3 Standard Functions

Point to point motion, triggered by either digital inputs or by ASCII commands across the RS-232 port. STEP/DIRECTION or CW/CCW pulse input with programmable resolutions. Up to 32 definable positions, speeds, and accelerations.

## CM3+ Logic and Networking

The built-in real time controller allows for advanced programmability and networking. Simultaneous multi-axis control and onboard PLC functionality can be used to maximize the performance of the CM3+ and reduce component count within your system.

	CM3			CM3+
Control Method	Direct	I/O	Pulse	
Number of Points	32	8	0	250
RSE232 Communication (settings and monitoring)	●	●	●	●
RSE232 Communication Control	●			●
I/O Control		●		●
Pulse control	●			●
Program Control				●
Daisy Chain				●
Cyclic Logic Operation				●



# SPECIFICATIONS

Model: **CM3 - 17L50A**

Model  
**CM3**  
**CM3+**

Motor Size  
17... 42   
23... 56

Motor Length  
S...Short  
L...Long

Max. Speed  
50... 5000rpm

Hardware  
Revision  
A





**CM3-17S50A**

**CM3+-17S50A**


**CM3-17L50A**

**CM3+-17L50A**

Input Supply Voltage	+24V dc				
Rated Current / Peak Current	3.5 [A] / 4.8 [A]		4 [A] / 5 [A]		
Motor Output	60 [W]		60 [W]		
Max. Speed	5000 [min <sup>-1</sup> ]				
Rated Torque	0.25 [N·m]		0.42 [N·m]		
Max. Torque	0.32 [N·m]		0.65 [N·m]		
Rotor Inertia Moment	0.036 x 10 <sup>-4</sup> [kg·m <sup>2</sup> ]		0.074 x 10 <sup>-4</sup> [kg·m <sup>2</sup> ]		
Allowable Inertia Moment of Load	Less than 10 times of Rotor Inertia				
Allowable Radial Load	37 [N]		32 [N]		
Allowable Thrust Load	10 [N]		10 [N]		
Encoder	High-precision incremental magnetic rotation angle sensor				
Resolution	From 300~12,000 [ppr] set by parameter				
Control Method	Closed Loop Vector Control				
I/O	Control Input	Digital Input: 6 (Includes 2 pulse inputs)	Digital Input:4	Digital Input: 6 (Includes 2 pulse inputs)	Digital Input:4
	Control Output	Digital Output:4 (Includes 1 error output)			
	STO Input	1			
Communication Port	RS-232C	RS-232C 2port	RS-232C	RS-232C 2port	
Mass	295 [g]		435 [g]		
Operating/Storage Temperature	-10°C ~ 50°C (non-freezing) / -20°C ~ 65°C (non-freezing)				
Operating/Storage Humidity	5 ~ 95% RH / 20 ~ 90% RH				

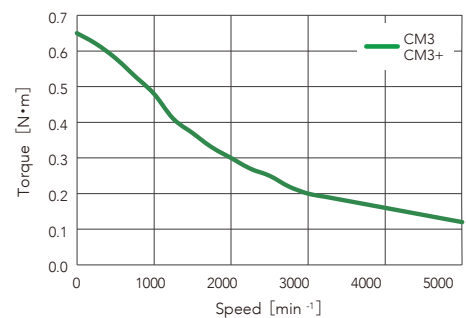
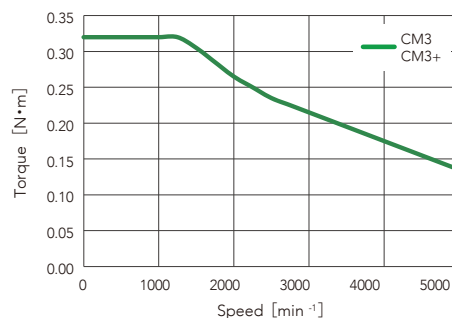


# Model: CM3 - 23L50A

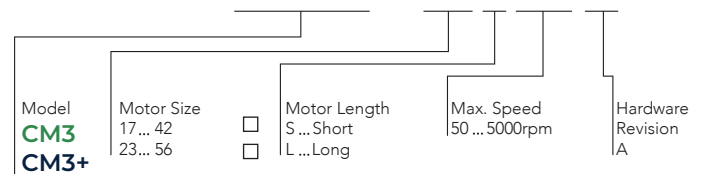

**CM3-23S50A**      **CM3+-23S50A**      **CM3-23L50A**      **CM3+-23L50A**



Input Supply Voltage		+24V dc			
Rated Current / Peak Current		4 [A] / 5 [A]		5 [A] / 6 [A]	
Motor Output		80 [W]		100 [W]	
Max. Speed		5000 [min <sup>-1</sup> ]			
Rated Torque		0.36 [N·m]		1.20 [N·m]	
Max. Torque		0.45 [N·m]		01.50 [N·m]	
Rotor Inertia Moment		0.1 x 10 <sup>-4</sup> [kg·m <sup>2</sup> ]		0.36 x 10 <sup>-4</sup> [kg·m <sup>2</sup> ]	
Allowable Inertia Moment of Load		Less than 10 times of Rotor Inertia			
Allowable Radial Load		77 [N]		70 [N]	
Allowable Thrust Load		15 [N]		15 [N]	
Encoder		High-precision incremental magnetic rotation angle sensor			
Resolution		From 300~12,000 [ppr] set by parameter			
Control Method		Closed Loop Vector Control			
I/O	Control Input	Digital Input: 6 (Includes 2 pulse inputs)	Digital Input: 4	Digital Input: 6 (Includes 2 pulse inputs)	Digital Input: 4
	Control Output	Digital Output: 4 (Includes 1 error output)			
	STO Input	1			
Communication Port		RS-232C	RS-232C 2port	RS-232C	RS-232C 2port
Mass		525 [g]		1050 [g]	
Operating/Storage Temperature		-10°C ~ 50°C (non-freezing) / -20°C ~ 65°C (non-freezing)			
Operating/Storage Humidity		5 ~ 95% RH / 20 ~ 90% RH			

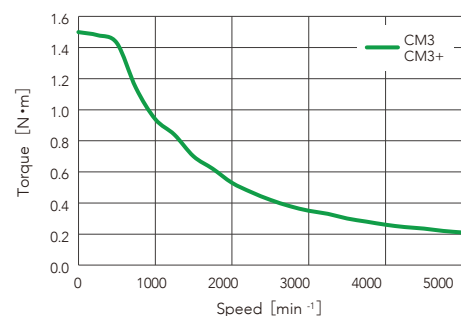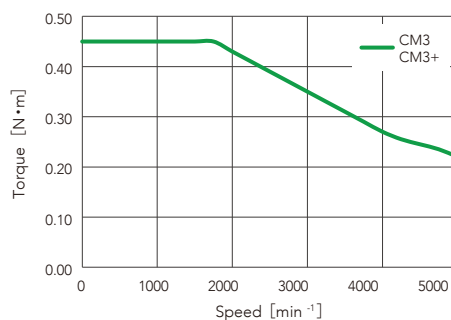

# DIMENSIONS



## CM3-17L50A CM3+-17L50A

- NEMA 17/42mm Square
- 5mmOD shaft with D cut
- M3 threaded mount
- Top exiting cable connector
- 60W, 0.32Nm, 5000rpm

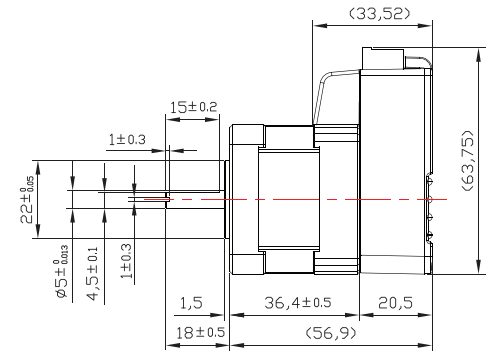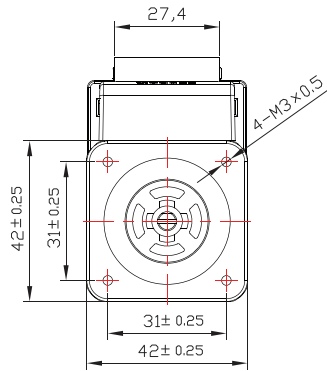



## CM3-17L50A CM3+-17L50A

- NEMA 17/42mm Square
- 5mmOD shaft with D cut
- M3 threaded mount
- Top exiting cable connector
- 60W, 0.65Nm, 5000rpm

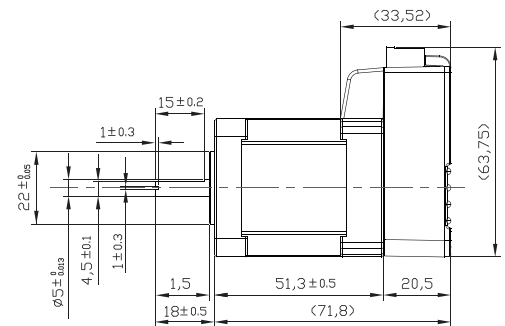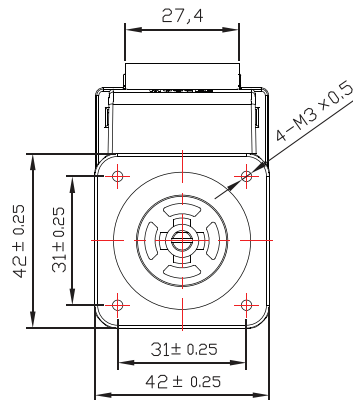



## CM3-23S50A CM3+-23S50A

- NEMA 23/56mm Square
- 6.35mmOD shaft with D cut
- M4 through hole mount
- Top exiting cable connector
- 80W, 0.45Nm, 5000rpm

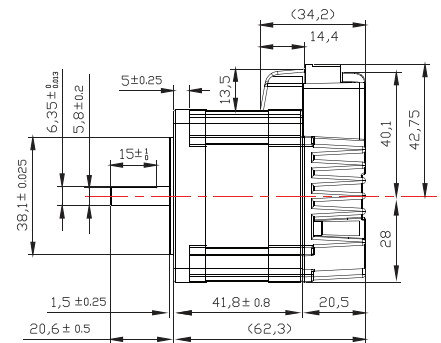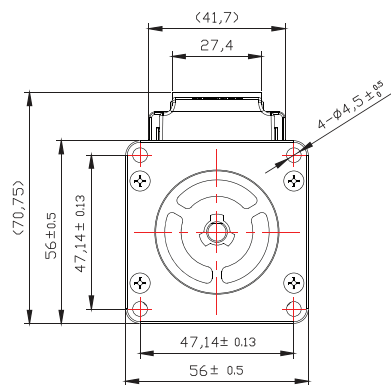


## CM3-23L50A CM3+-23L50A

- NEMA 23/56mm Square
- 6.35mmOD shaft with D cut
- M4 through hole mount
- Top exiting cable connector
- 100W, 1.5Nm, 5000rpm

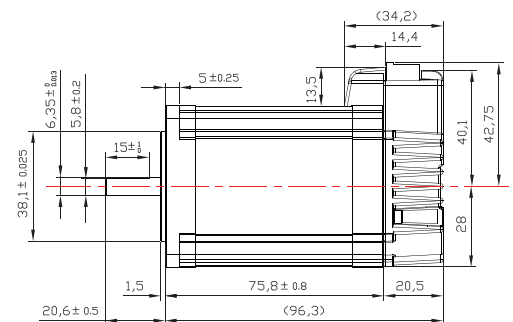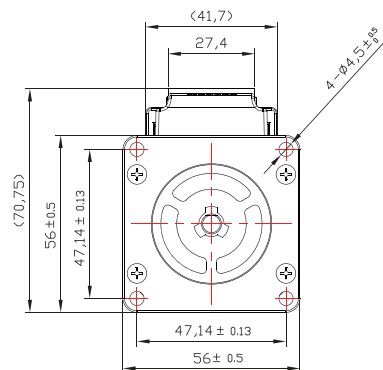

# CONNECTION

## Wiring options - CM3 and CM3+

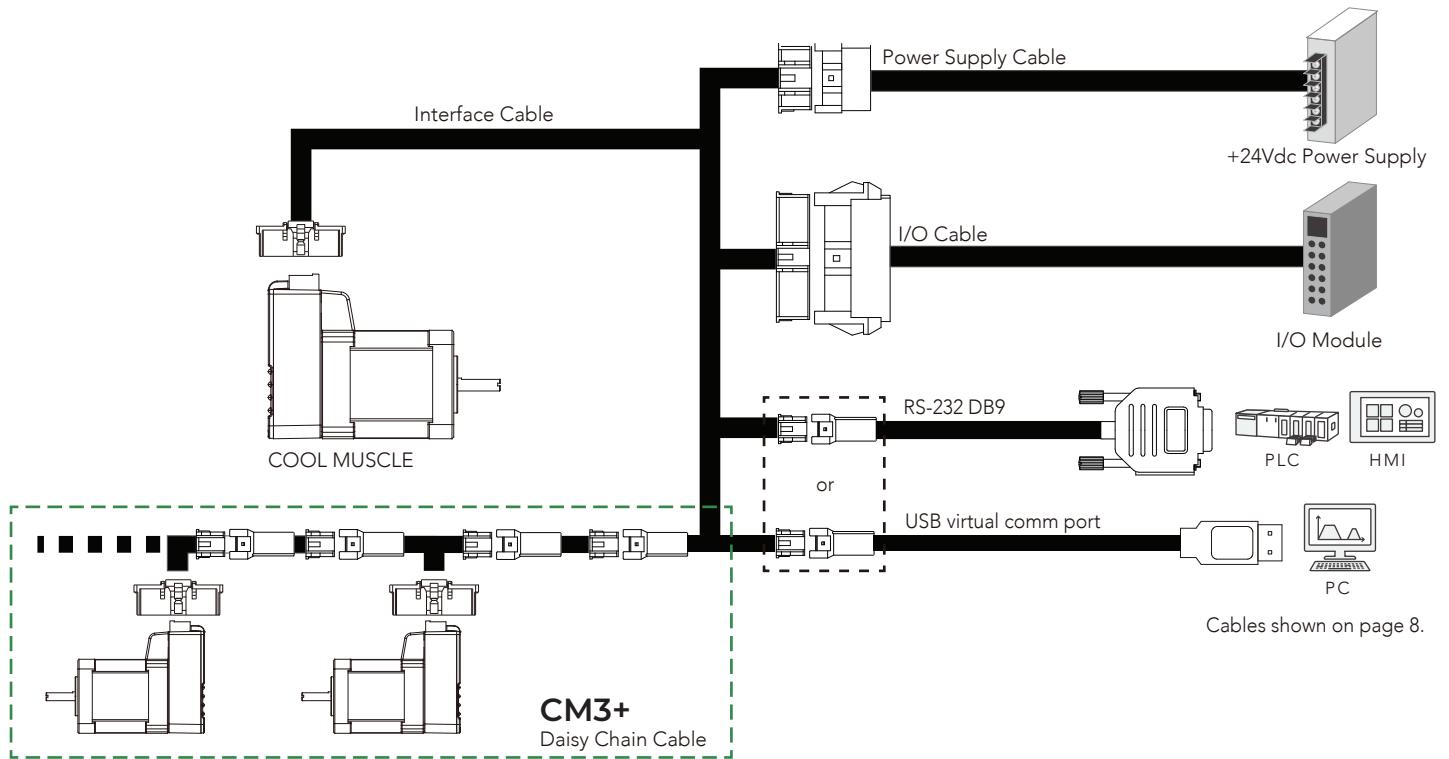


## Pin Configuration

Connection via a 24-pin connector at the top of the CM3.

### CM3 24 Pin Connector - Molex 55959-2430


NAME	PIN No
GND	2
ERROR	4
OUT3 / Z Phase	6
OUT2 / B Phase	8
OUT1 / A Phase	10
STO_IN+	12
INPUT6- / PULSE B-	14
INPUT5- / PULSE A-	16
INPUT4	18
INPUT2	20
P-GND	22
POWER	24

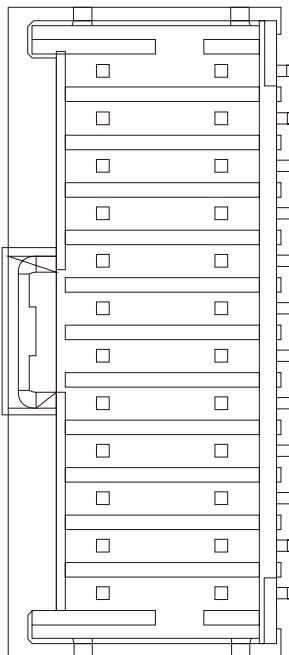

PIN No	NAME
1	FG
3	GND
5	RXD0
7	TXD0
9	STO_IN-
11	INPUT6+ / PULSE B+
13	INPUT5+ / PULSE A+
15	IN-COM
17	INPUT3
19	INPUT1
21	P-GND
23	POWER

### CM3+ 24 Pin Connector - Molex 55959-2430

NAME	PIN No
+5Vdc	2
D_GND	4
RXD1	6
TXD1	8
OUT3	10
OUT1	12
D_GND	14
STO_IN+	16
INPUT3	18
INPUT1	20
P-GND	22
POWER	24

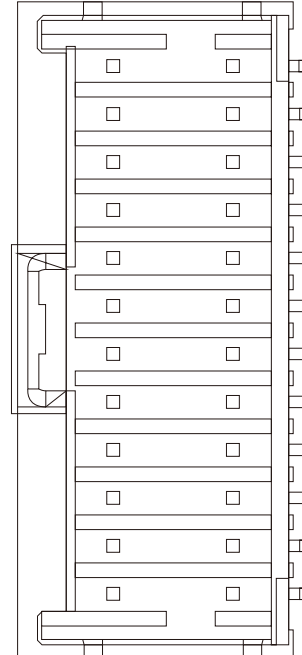

PIN No	NAME
1	FG
3	D_GND
5	RXD0
7	TXD0
9	ERROR
11	OUT2
13	STO_IN-
15	INPUT4
17	INPUT2
19	IN_COM
21	P-GND
23	POWER

For more information, please refer to the user's guide.



# CABLING

All cables can be ordered to custom lengths in increments of 50mm.  
Max. length dependant on signal type.


## Model: CM3IO1-1000S

Motor	Usage	Type	Length	Cable End
CM3	IO - I/O	CM3	1000 - 1000mm	S - Single Ended
	F - Main Interface	CM3+	1050 - 1050mm	W - All Ends Connectorized
	US - USB		2000 - 2000mm	
	RS - RS-232		... in 50mm increments	
	DC - Daisy Chain			
	PW - Power			

## CM3


### Interface Cable

CM3F1-1000W

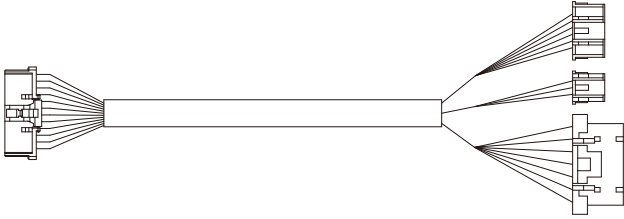

### I/O Cable


CM3IO1-1000S



## CM3+


### Interface Cable

CM3F1+1000W

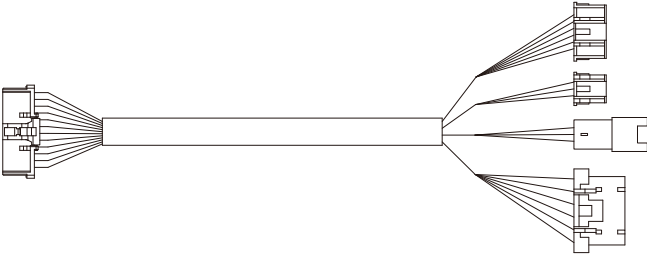


### I/O Cable

CM3IO1+1000S



### Daisy Chain Cable


CM3DC1-1000W



## CM3 & CM3+ Common Cables


### RS-232 Cable

CM3RS1-1000W

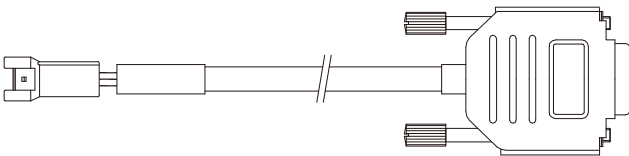


### Power Supply Cable

CM3PW1-1000S



### USB Cable

CM3US2-1800W



# Cool Muscle Family

CM1-E  
CM1-T  
CM1  
CM2  
CM3  
CM3+



# ADDITIONAL COOL MUSCLE SERIES

## CM1 Series

24Vdc Drive, Programmable Controller, 50Kppr Encoder

Interfaces: Step/Direction, TTL, USB, RS-232, RS-485, Ethernet IP, EtherCAT, MODBUS TCP, MODBUS RTU, Programmable I/O

### 28mm Frame

CM1-C-11S30




Output : 9W  
Max. Speed 3000rpm  
Rated Torque 0.027Nm

CM1-C-11L30




Output : 18W  
Max. Speed 3000rpm  
Rated Torque 0.055Nm

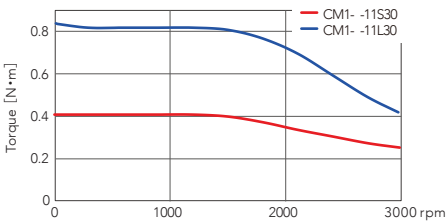

### 42mm Frame

CM1-C-17S30




Output : 18W  
Max. Speed 3000rpm  
Rated Torque 0.082Nm

CM1-C-17L30



Output : 18W  
Max. Speed 3000rpm  
Rated Torque 0.36Nm

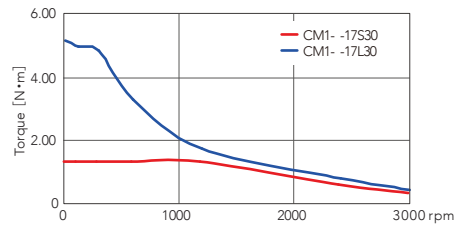


### 56mm Frame

CM1-C-23S30




Output : 45W  
Max. Speed 3000rpm  
Rated Torque 0.29Nm

CM1-C-23L20



Output : 30W  
Max. Speed 2000rpm  
Rated Torque 0.87Nm

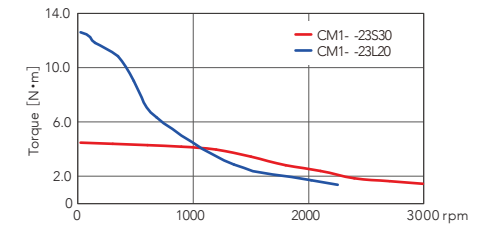

CM1-E provides EtherCAT connectivity  
CM1-T provides EthernetIP & MODBUS TCP

CM1-E-17S30D  
CM1-T-17S30D

CM1-E-17L30D  
CM1-T-17L30D

CM1-E-23S30D  
CM1-T-23S30D

CM1-E-23L20D  
CM1-T-23L20D

Connectors:  
RJ45 for Ethernet  
M9 for 24Vdc Power and I/O  
Separate Control and Power inputs  
for STO circuits



## CM2 Series

100-240VAC Drive, Programmable Controller, 50Kppr Encoder

Interfaces: Step/Direction, USB, RS-232, EtherCAT, MODBUS TCP, MODBUS RTU, Programmable I/O

### 56mm Frame

CM2-C-56B10




Output: 100W  
Max. Speed: 8000rpm  
Rated Torque: 0.19Nm

CM2-C-56B20



Output: 200W  
Max. Speed: 8000rpm  
Rated Torque: 0.32Nm

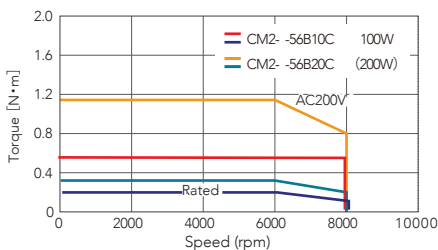

### 60mm Frame

CM2-C-60A10



Output: 100W  
Max. Speed: 5000rpm  
Rated Torque: 0.32Nm

CM2-C-60A20





Output: 200W  
Max. Speed: 5000rpm  
Rated Torque: 0.64Nm

CM2-C-60A40



Output: 400W  
Max. Speed: 5000rpm  
Rated Torque: 1.09Nm

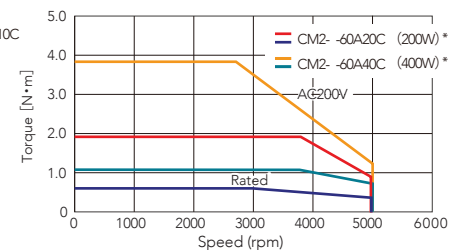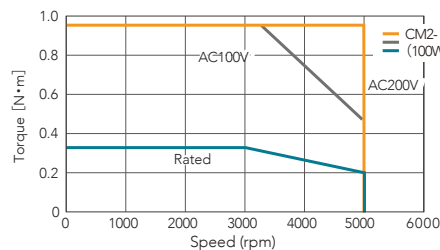


\* Input Voltage is AC200-240V

# Cool Muscle ACCESSORIES

The intelligence and efficiency of the COOL MUSCLE servos, combined with an **EtherCAT** interface

EtherCAT is registered trademark and patented technology licenced by Bekhoff Automation GmbH, Germany.

CM1, CM2, & CM3 Cool Muscles

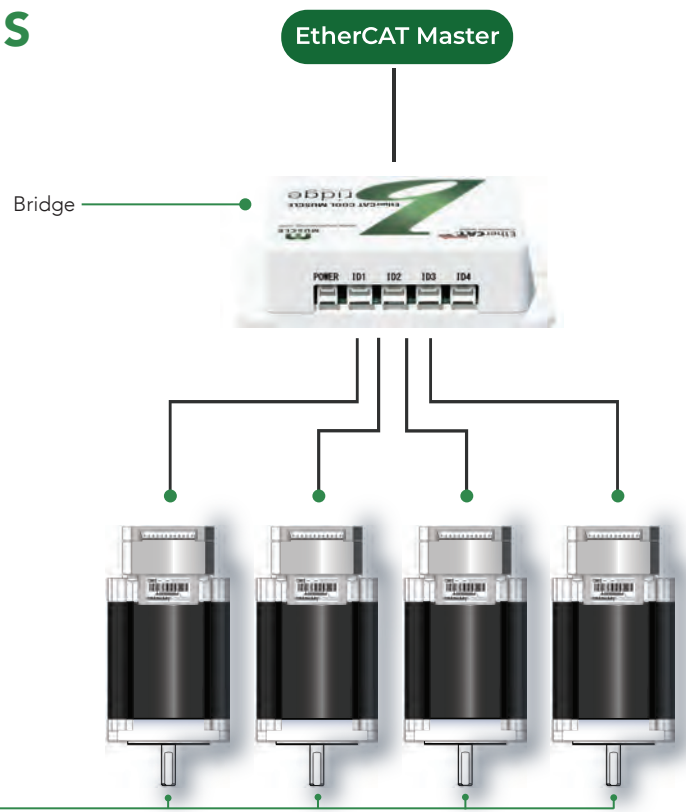

## Ethercat Cool Muscle Bridge

EtherCAT Cool Muscle Bridge is Muscle Corporation, new 4-axis interface for EtherCAT networks. Four CM1, CM2, or CM3 motors can be connected to each bridge allowing for control of the Cool Muscles as an EtherCAT slave from an EtherCAT Master across a high performance network. The application layer conforms to the CiA402 Drive Profile, with unique operation modes including Cyclic Synchronous Position mode (cpm) and Homing mode (hm). The EtherCAT Master sends position commands to, and receives feedback from the EtherCAT Slave at a communications frequency of 1msec.


### ETHERCAT FEATURES

1. Implements CiA402 drive profile.
2. CSP, CSV, PV, PP and HM modes are available
3. Intergrated IO mapped to PDO objects
4. 1ms PDO timing for accurate synchronized motion
5. Explicit Device ID for enhanced device identification



## Break-out Boards and Network Cards

Myostat offers a series of breakout boards, cabling adaptors, and network devices for the entire Cool Muscle line. Contact Myostat to identify the right breakout board for your system.

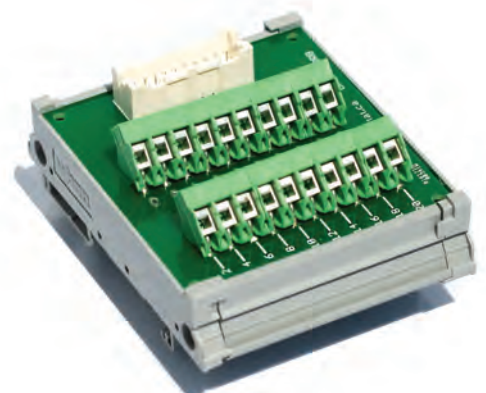

# Cool Muscle Gear Series

## GEARBOX PERFORMANCE

All gearboxes are pre-matched for Cool Muscle servos. Torque and speed output specifications are dependant on the matched motor. The LS Series gearbox operates at a 95% efficiency rating for the single stage model + gearbox combination. Gearbox backlash is measured at 6arc/ min for single stage units and 10arc/min for double stage units. All gearboxes are sealed for use in any orientation and rated to IP65




40mm, 60mm and 90mm size frames are available to fit NEMA 17 to 34, or 40mm to 90mm size motor frame sizes. CAD files with full dimensions for each size available at [www.myostat.ca](http://www.myostat.ca)


**With ratios of 20:1 or greater, please use the LX-090 size gearbox with the CM2-X-60A40C**

# Cool Muscle Actuator Series

Myostat offers a large range of electric actuators built around ball screws, lead screws and belt drives. The high torque density and top speeds of the CM3 motor make the Cool Muscle an great choice for pick and place gantries, dynamic process machinery, and rapid cycling motion. Matching a Cool Muscle to an ISO15552 compatible ball screw rod style actuator creates an easy to implement, cost effective pneumatic replacement.

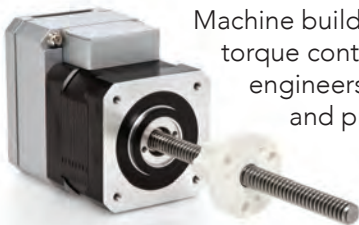

Machine builders can quickly enhance an operation, positional accuracy and torque control, while reducing energy consumption and noise. At Myostat, engineers will help you pick the right combination of hardware and provide setup support for your next design.

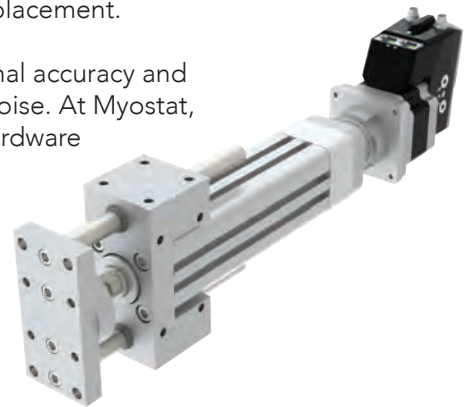

# In-line Brakes

Myostat offers 3 sizes of inline brakes to fit motor sizes between 42mm and 60mm square. Each brake is powered with 24Vdc, engaging in the power off state. Please refer to the data sheets for dimensions, holding torque and power consumption.

**IB42**



**IB56**



**IB60**




# FUNCTIONS - CM3 & CM3+ Examples

## MOTION FOR PRESS FITTING, FIXTURING, or LAB PROCESSES


### Torque Limiting . . . . .

Utilizing the motor's control of output torque, the CM3 can be used in torque sensitive applications such as fixturing, gripping, pressing, and winding with limiting force.

Push Motion: A push move can be included into a motion program between two high speed moves. A gripper or rod cylinder can quickly move into place, hold a part for a fixed amount of time, then release. This program can be triggered with a digital input, or over a serial port.

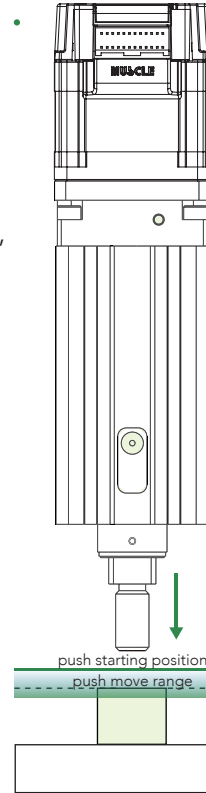

1. Advance to a press position at high speed.
2. Push or hold at a set torque.
3. Return at a high speed to the initial position.

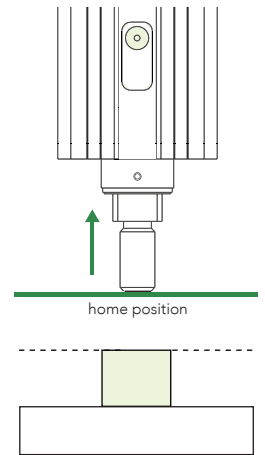

### Programmed Soft Limits

To reduce the risk of collision the motor has definable position limits that are relative to the home position.

A definable offset from a sensor or mechanical home position also allows more flexibility in machine calibration.

### Origin Search

The Cool Muscle includes built-in homing functions. A combination of mechanical stops, origin sensors, and the encoder's Z-phase signal are available to home each axis.

#### Homing Options

0	Mechanical Stop Detection
1	Mechanical Stop Detection on power up
2	Home Sensor
3	Home Sensor of power up
4	Mech. Stop Detection & Z Phase
5	Mech. Stop Detection & Z Phase on power
6	Home Sensor & Z Phase
7	Home Sensor & Z Phase on power up
8	Z Phase Signal
9	Z Phase Signal on power up

### Zone Output Function

A signal can be output within the specified position range for use as a trigger or status output.


#### INDIVIDUAL ZONE OUTPUT:

The signal is output only within the range set by each point data.

#### ZONE OUTPUT:

The signal is always output within the range set by the parameter regardless of the point data.

#### ZONE OUTPUT RANGE

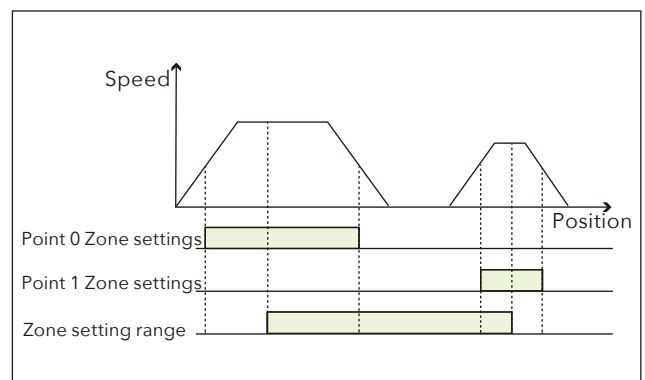

# I/O Functions

## DIGITAL I/O

The CM3 provides access to configurable digital inputs and outputs for use as triggers.

**COOL MUSCLE 3** : 6 Inputs, 4 Outputs, 1 STO Input

**COOL MUSCLE 3+** : 4 Inputs, 4 Outputs, 1 STO Input

### CM3

Common to each type	Limit sensor, Home to Hard Stop
Direct type	Origin sensor, Manual mode, Inching/Feed, Jog, Servo on/off, Stop
I/O type	Origin sensor, Point data specification, Point data execution/stop
Pulse type	Torque limit on/off, Position reset

### CM3+

Origin sensor, Limit sensor, Home to Hard Stop, Manual mode, Inching/Feed, Jog, Servo on/off, Origin sensor, Stop
---

## Output Function Examples

<b>CM3</b>	General, in-position, warning, individual zone, zone, move, busy, end, servo on/off, torque limit, origin search completed, <b>ABZ encoder</b>
<b>CM3+</b>	General, in-position, warning, individual zone, zone, move, busy, end, servo on/off, torque limit, origin search completed

## Warning Indicators

If the motor temperature or load factor exceeds a preset value, a warning can be output before the motor stops in an alarm state. Detecting approaching device limitations in advance helps reduce downtime.

## STO Function

Safe Torque Off (STO) capability built into CM3 . This implementation a safety function to cut power to the motor's drive using an input signal from a safety controller or circuit.



# Gain Tuning & Tuningless Options

Selecting the tuningless function enables large inertia drive and belt mechanisms to be driven without additional gain adjustments. Selecting the PPI control function allows for precise tuning of critical load conditions.

# Simplified Motion and Performance Feedback

COOL WORKS QUICK is support software exclusively for the CM3 / 3+. Easy parameter setting and positioning data setting windows speed programming.

By using the graph window, you can check the motor position, speed, and torque data with the command value and the waveform of the actual operation, which can greatly reduce the adjustment time.

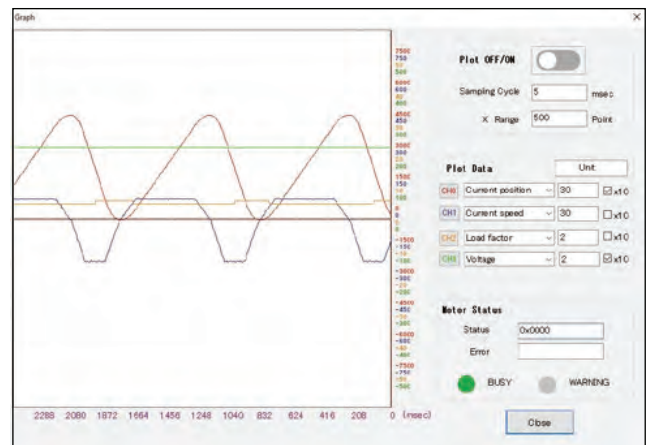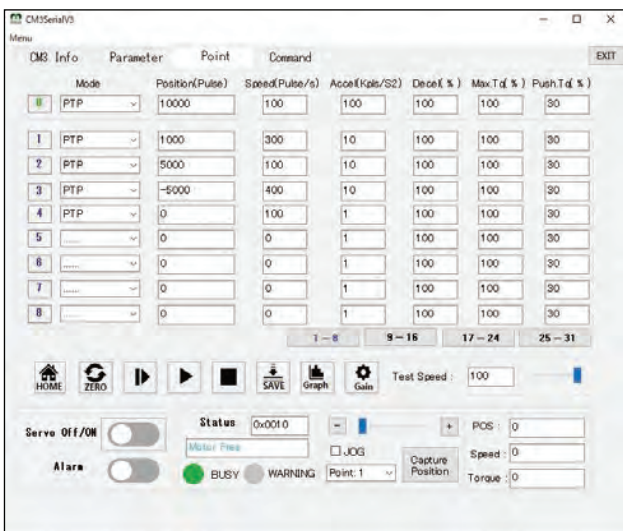


# Programmable Resolution

Motor resolution is programmable, with settings between 300ppr and 12000ppr.

## Resolution Setting Increments in Pulses per Rotation (ppr)

0 : 300	5 : 3000
1 : 600	6 : 5000
2 : 1000	7 : 6000
3 : 1200	8 : 10000
4 : 2000	9 : 12000

The Cool Muscle uses a magnetic rotary position encoder reducing the risk of failure and extending system life span.

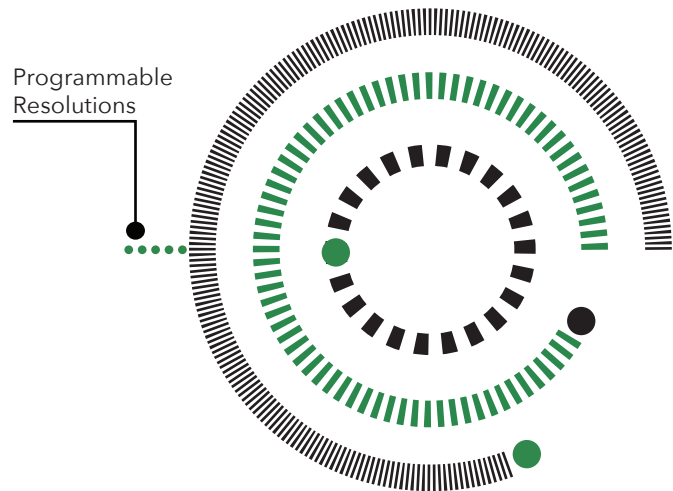





# MYOSTAT

17817 LESLIE ST #21, NEWMARKET, ON,  
CANADA, L3Y 8C6

Tel. (905) 836-4441

[www.myostat.ca](http://www.myostat.ca) | [info@myostat.ca](mailto:info@myostat.ca)

\*Specifications subject to change without notice.

© Muscle Corporation, All Rights Reserved 2020

Manufactured in Japan by  
**MUSCLE CORPORATION**



MYOSTAT MOTION CONTROL INC.